

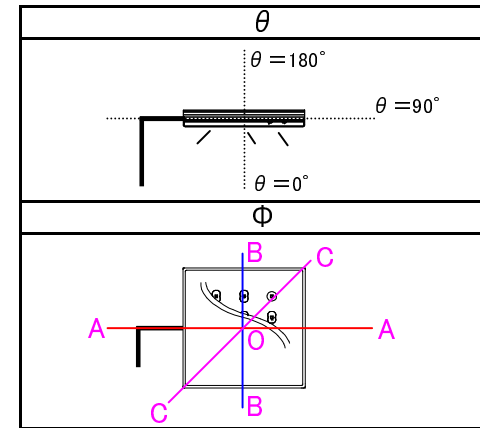
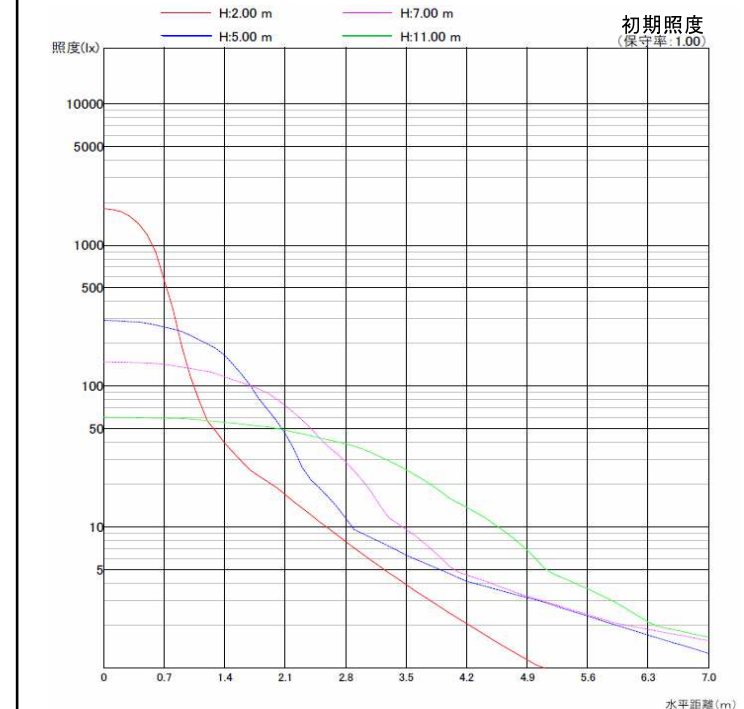
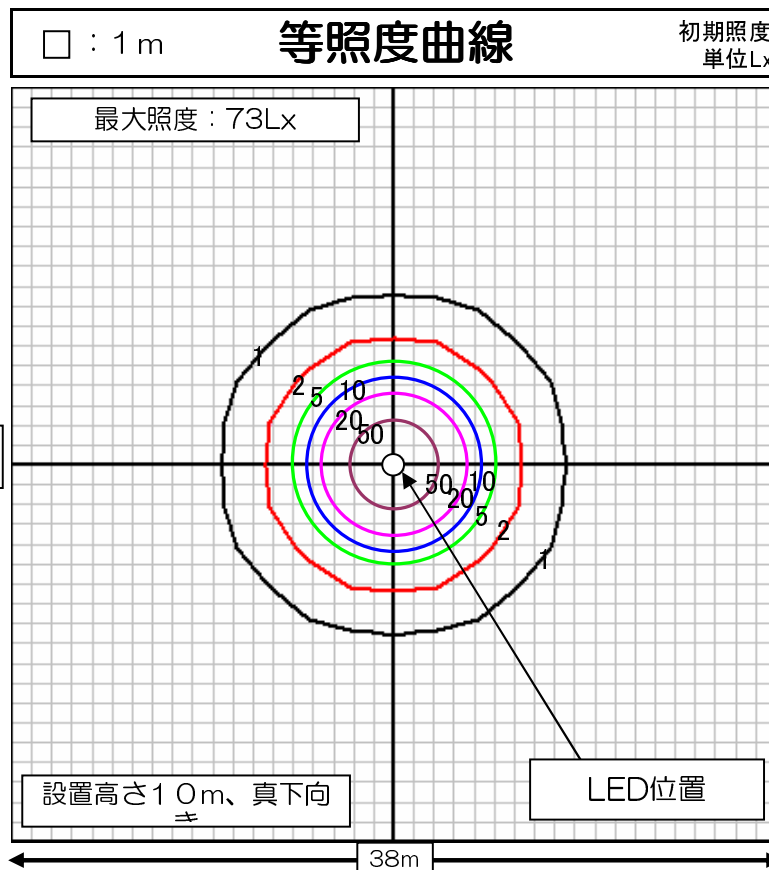


	品名	LEDワイドスクエアライト
	型番	LED-12-40DA
	光源	高輝度白色LED12球
	配光の種類	対称配光

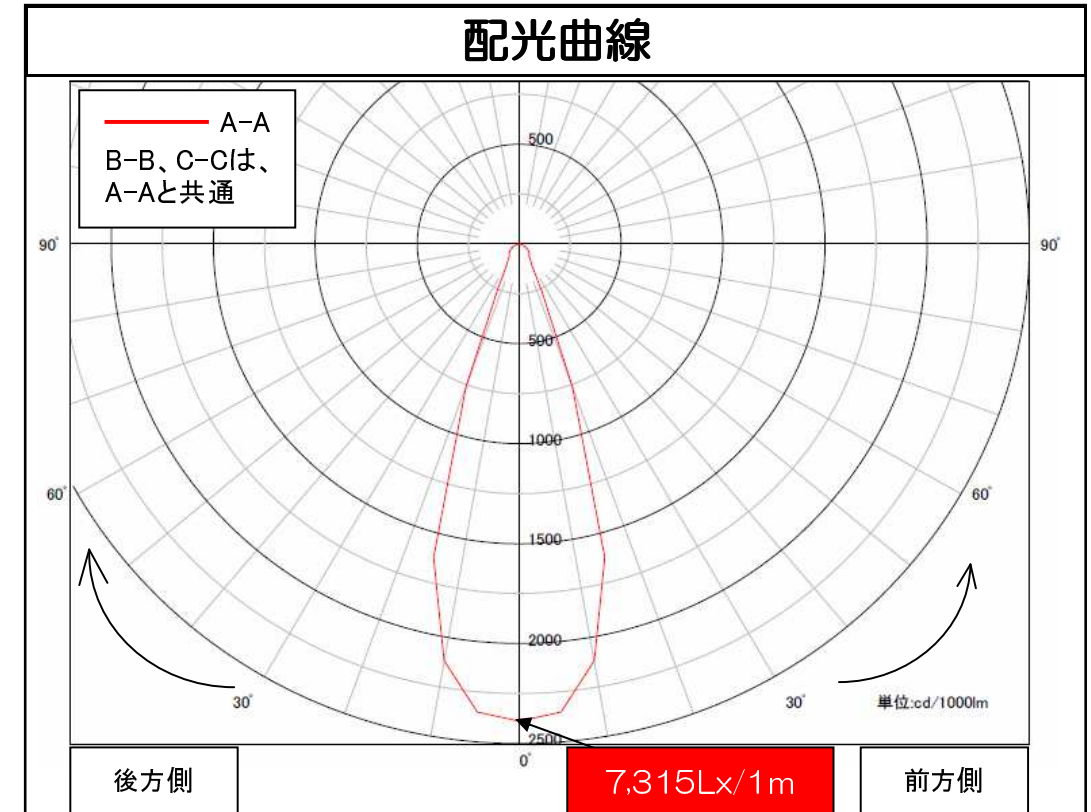

組合せ電源装置	
品番 : HLG-60H-20A	
配光角	水平40度、垂直40度
一次側消費電力について	
電源装置AC100V入力時	電源装置AC200V入力時
29.3W/29.7VA	29.3W/30.7VA

照明器具製品仕様	
電源電圧	DC12.18V
電流	2.1A
消費電力	25.6W
照度	(中心) 7,315Lx/1m
器具光束	3,066Lm
光源光束	3,451Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力) (AC200V時)	104.6Lm/W
色温度	5,000K +200K -500K
演色性	70~73

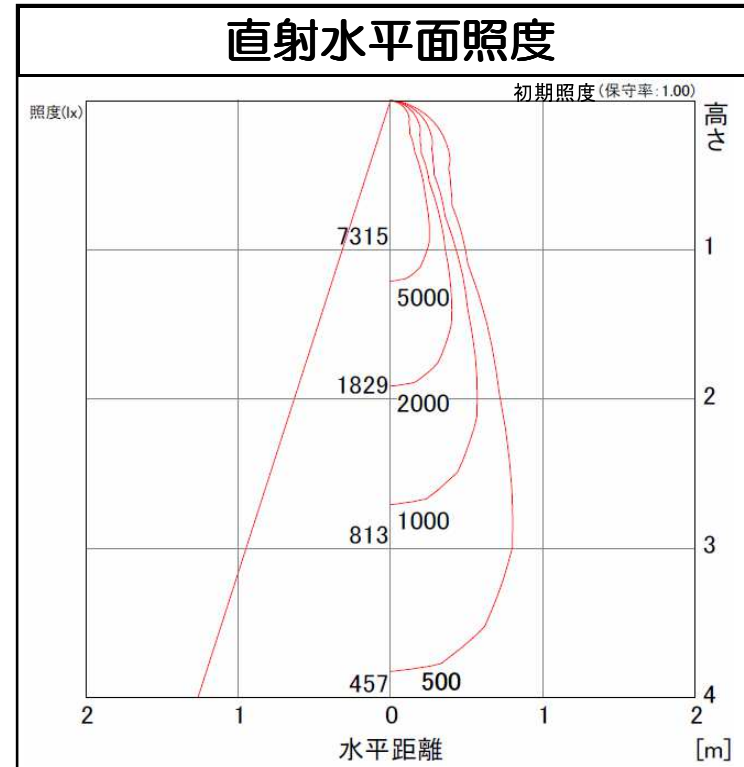

照明率表

作業面照明率(×0.01)

反射率(%)		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	61	79	90	96	103	107	112	116	118	122	124	126	128
		10	57	73	81	87	91	94	98	100	102	104	105	106	107
	50	30	50	68	78	86	93	97	104	109	112	117	120	124	126
		10	48	64	74	80	85	88	93	96	98	101	103	105	107
	30	30	43	61	71	78	86	91	98	103	107	113	116	121	125
		10	42	59	68	74	80	84	89	93	96	99	101	104	106
70	70	30	60	78	88	94	100	104	109	112	115	118	120	122	124
		10	56	72	80	85	90	93	96	99	100	102	104	105	106
	50	30	49	67	77	84	91	96	102	106	109	114	116	120	122
		10	48	64	73	79	84	88	92	95	97	100	102	104	106
	30	30	43	60	71	78	85	89	96	101	105	110	113	117	121
		10	42	59	68	74	80	84	89	92	95	98	100	103	105
50	70	30	60	78	88	94	100	104	109	112	115	118	120	122	124
		10	56	72	80	85	90	93	96	99	100	102	104	105	106
	50	30	48	66	75	82	88	92	97	101	104	107	110	112	115
		10	47	63	72	78	83	86	91	94	96	98	100	102	103
	30	30	43	60	70	76	83	87	93	97	100	105	107	111	113
		10	42	58	67	73	79	83	88	91	93	97	99	101	103
30	70	30	43	61	71	78	86	91	98	103	107	113	116	121	125
		10	39	55	64	71	77	81	86	90	93	97	100	103	105
	50	30	48	66	75	82	88	92	97	101	104	107	110	112	115
		10	47	63	72	78	83	86	91	94	96	98	100	102	103
	30	30	42	59	68	75	81	84	89	92	95	98	100	102	103
		10	42	58	67	73	78	82	87	90	92	95	97	99	101
0	0	0	37	53	62	68	74	77	82	86	88	91	94	96	98

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります