






LEDワイドスクエアライト	品名	LEDワイドスクエアライト
	型番	LED-W-12-WA
	光源	高輝度白色LED12球
	配光の種類	非対称配光

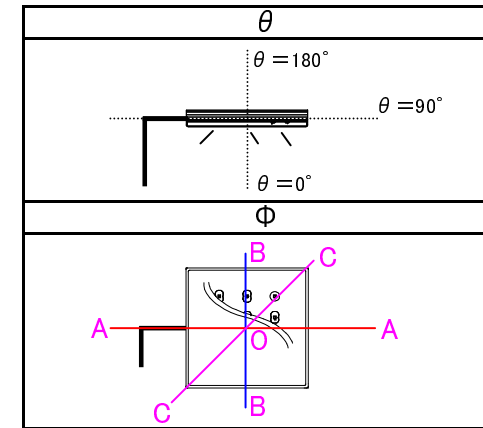

組合せ電源装置	
品番 : HLG-60H-20A	
配光角	水平140度、垂直85度

一次側消費電力について	
電源装置AC100V入力時	電源装置AC200V入力時
29.3W/29.7VA	29.3W/30.7VA

照明器具製品仕様	
電源電圧	DC12.18V
電流	2.1A
消費電力	25.6W
照度	(中心) 821Lx/1m (130度) 2,289Lx/1m
器具光束	2,797Lm
光源光束	3,451Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力) (AC200V時)	95.5Lm/W
色温度	5,000K +200K -500K
演色性	70~73

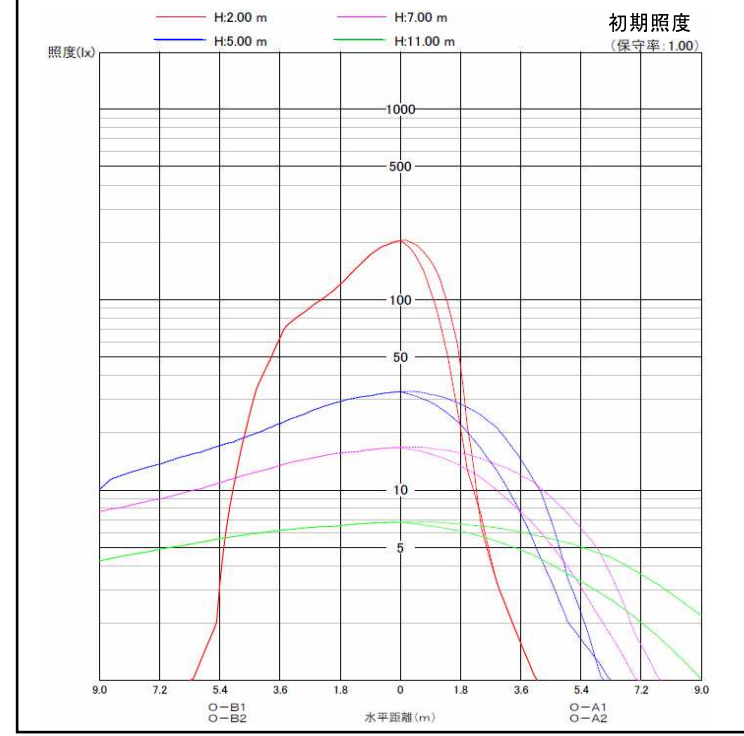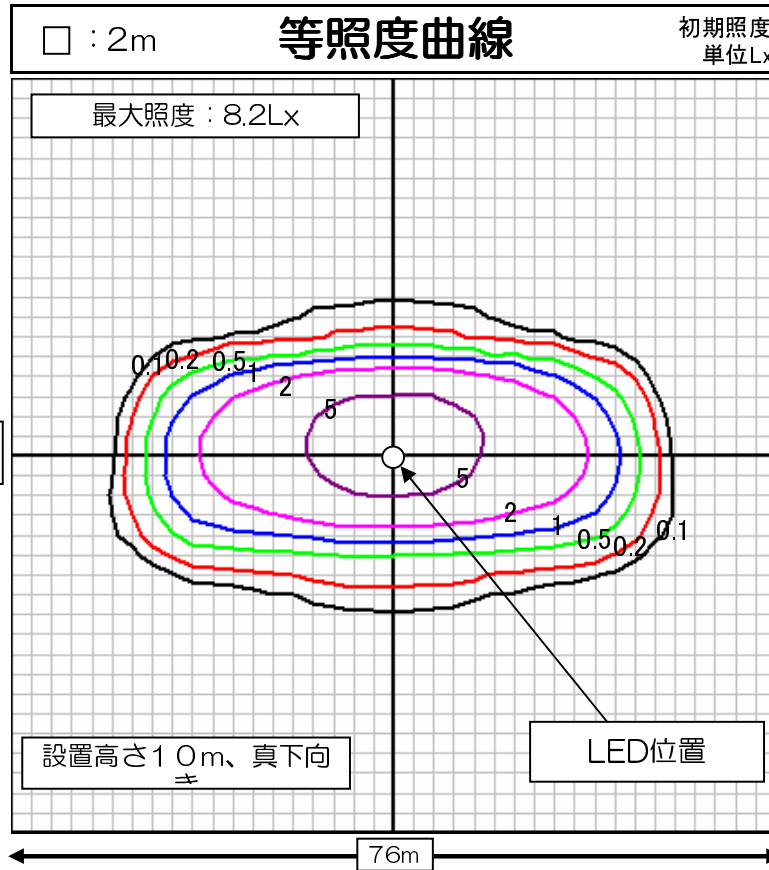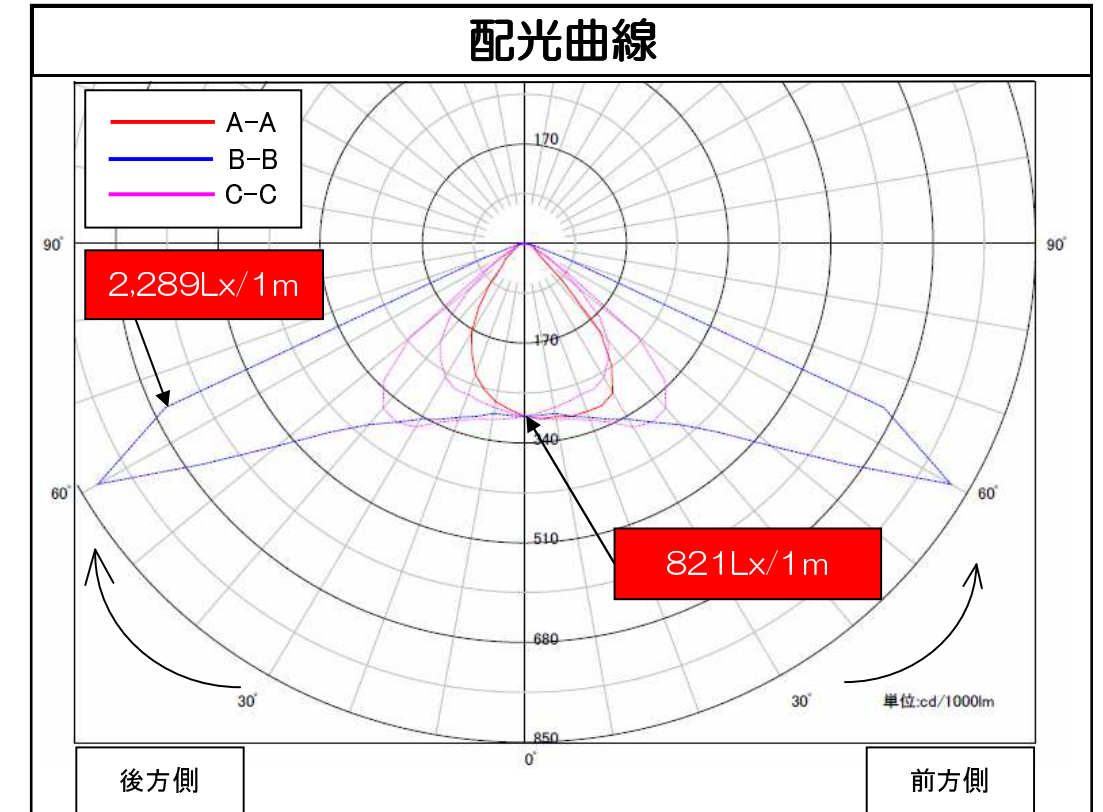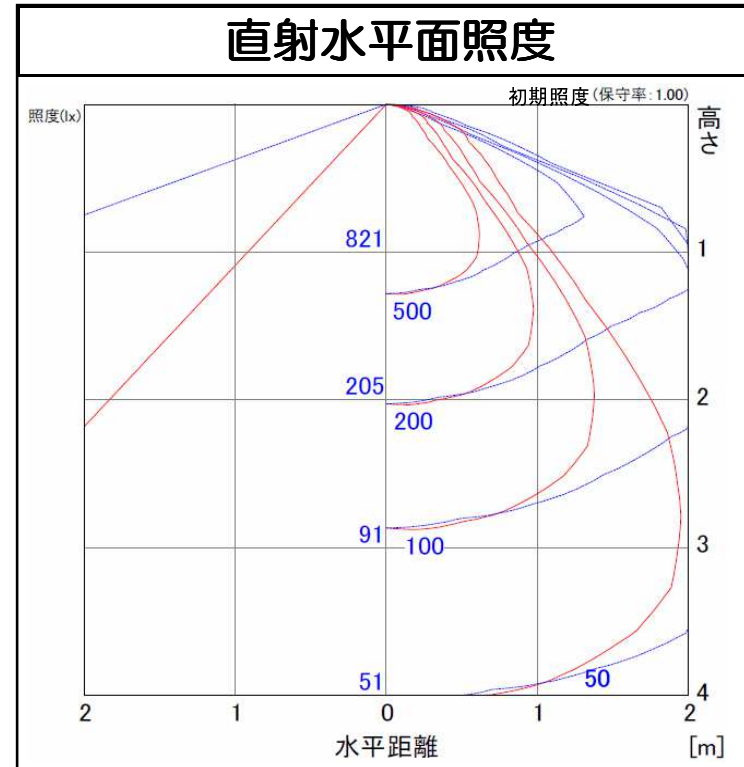

照明率表

		作業面照度率(×0.01)													
		反射率(%)		室指数											
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	61	73	82	91	97	105	110	113	118	121	124	126
	50	30	41	56	66	74	81	85	91	95	97	100	102	104	105
	10	29	44	54	63	71	76	84	89	92	96	99	102	104	
70	30	30	22	37	48	58	68	75	86	93	98	106	110	116	120
	50	30	22	36	46	55	64	70	78	84	88	93	96	100	102
	10	10	17	31	40	49	58	64	73	80	84	90	93	97	101
50	70	30	43	59	70	79	88	93	101	106	109	114	116	119	121
	50	30	30	46	57	66	76	82	92	98	102	108	111	116	119
	10	10	29	44	53	62	70	75	83	88	91	95	98	101	103
30	30	30	22	37	48	57	67	74	84	91	96	103	107	112	116
	50	30	22	36	46	55	64	69	78	83	87	92	95	99	101
	10	10	17	31	40	49	58	64	73	79	83	89	93	97	100
0	50	30	29	44	55	64	73	79	87	93	97	102	105	108	111
	30	30	22	36	47	56	65	71	81	87	92	98	101	106	109
	10	10	21	36	45	54	63	68	76	82	86	90	93	97	99
0	30	30	21	36	46	54	64	69	78	84	88	93	96	100	103
	10	10	17	35	44	53	62	67	75	81	84	89	92	95	97
	0	0	15	29	38	46	55	60	69	75	79	84	87	91	93

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります