






LEDパワフルスクエアライト	品名	LEDパワフルスクエアライト
	型番	LED-W-40/100C
	光源	高輝度白色LED40球
	配光の種類	対称配光

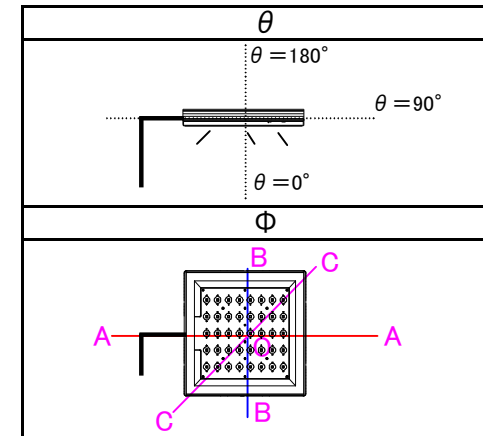

組合せ電源装置		
品番：HLG-320H-42A		
配光角	1/2ビーム角	100度
	1/10ビーム角	145度

一次側消費電力について	
電源装置AC100V入力時 220.4W/222.3VA	電源装置AC200V入力時 215.9W/221.2VA

照明器具製品仕様	
電源電圧	DC31.4V
電流	6.4A
消費電力	201W
照度	(中心) 8,190Lx/1m
器具光束	19,320Lm
光源光束	23,500Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力) (AC200V時)	89.7Lm/W
色温度	5,000K +300K -700K
演色性	75

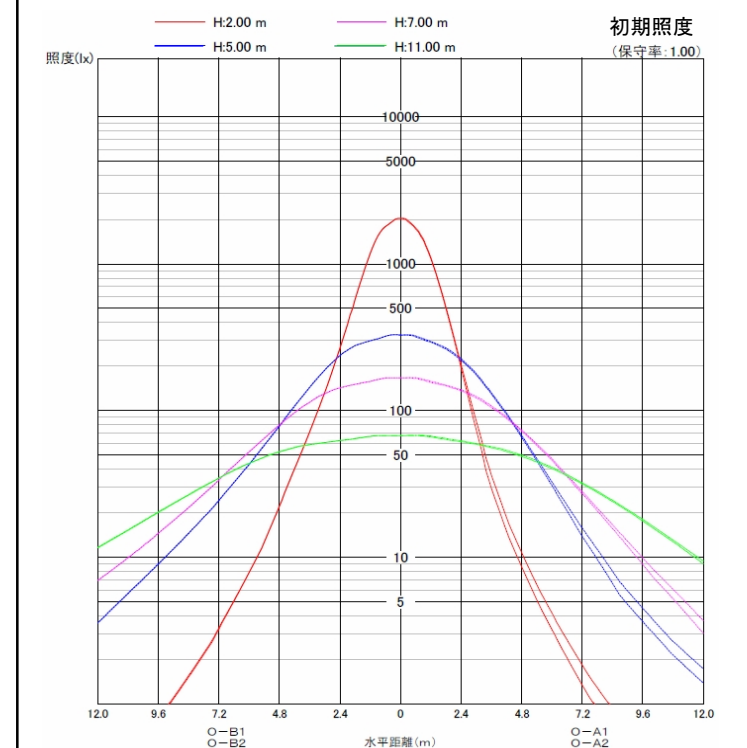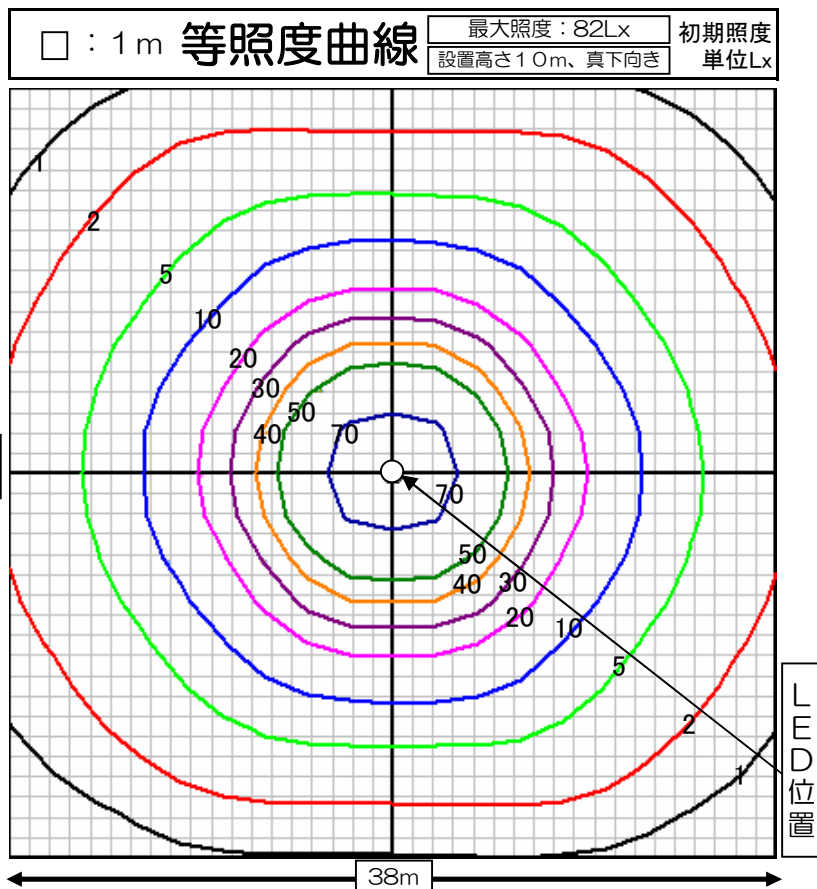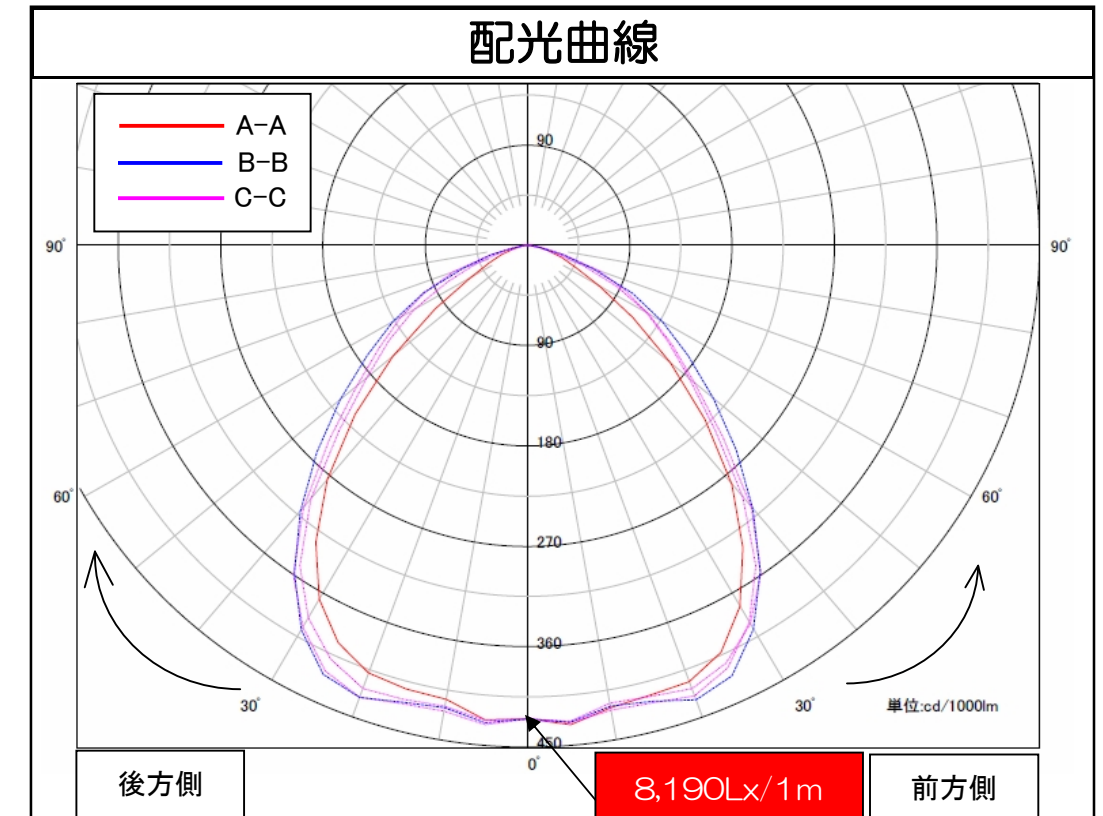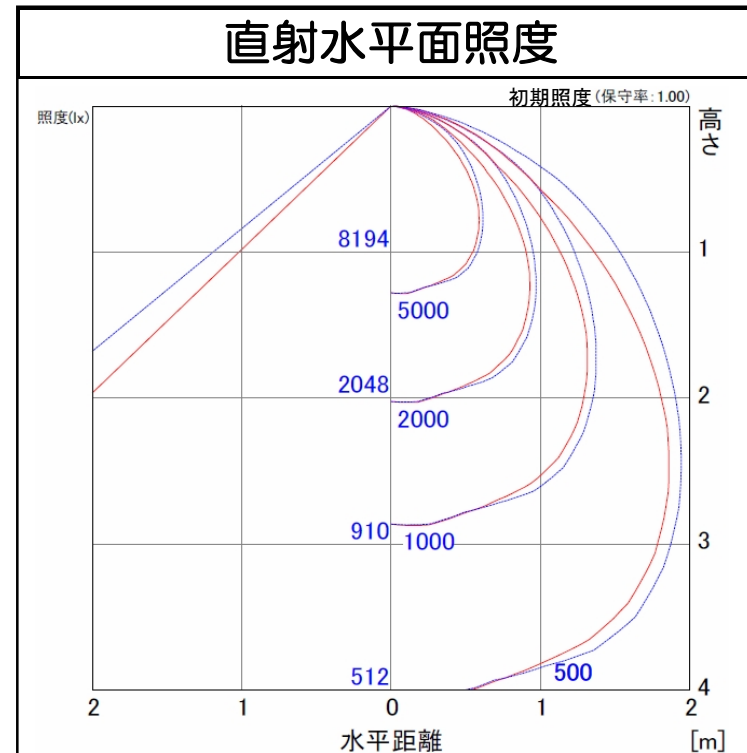

### 照明率表

作業面照明率 (×0.01)

天井	壁	床	室指数												
			0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	50	69	79	88	96	101	108	113	115	119	122	125	127
		10	47	64	72	79	85	89	94	97	99	101	103	105	106
	50	30	37	56	66	75	84	90	98	104	108	113	117	121	124
		10	36	53	62	70	77	81	88	92	95	98	100	103	105
70	30	30	30	48	57	66	76	81	91	98	102	108	112	117	121
		10	30	46	55	63	71	76	83	88	91	95	98	101	103
	10	10	25	42	50	58	67	71	79	84	88	92	96	99	102
		30	49	68	77	85	93	98	104	109	112	115	117	120	122
50	10	46	63	71	77	84	87	92	96	98	100	102	103	105	
		50	37	55	65	74	83	88	96	102	105	110	113	117	120
	10	36	53	61	69	77	81	87	91	94	97	99	101	103	
		30	30	47	56	66	75	80	89	96	100	105	109	114	117
30	10	29	46	54	63	71	75	82	87	90	94	97	100	102	
		50	36	52	60	67	75	79	85	89	92	95	97	99	101
	10	30	30	47	55	64	73	78	86	92	95	100	104	107	110
		30	29	46	54	62	70	74	81	86	89	93	95	98	100
0	10	25	41	49	57	66	70	77	83	86	90	93	97	99	
		30	29	46	54	63	71	76	83	88	91	96	98	102	104
	10	29	45	53	61	69	73	80	85	87	91	94	96	98	
		30	25	41	49	57	65	70	77	82	85	89	92	95	97

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります