






LEDパワフルスクエアライト	品名	LEDパワフルスクエアライト
	型番	LED-W-40/70C
	光源	高輝度白色LED40球
	配光の種類	対称配光

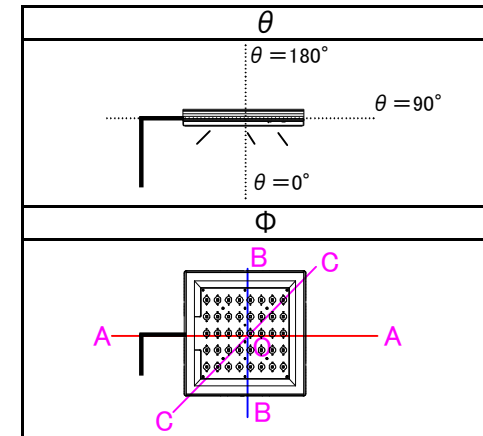

組合せ電源装置		
品番：HLG-320H-42A		
配光角	1/2ビーム角	70度
	1/10ビーム角	115度

一次側消費電力について	
電源装置AC100V入力時 220.4W/222.3VA	電源装置AC200V入力時 215.9W/221.2VA

照明器具製品仕様	
電源電圧	DC31.4V
電流	6.4A
消費電力	201W
照度	(中心) 14,100Lx/1m
器具光束	20,520Lm
光源光束	23,500Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力)(AC200V時)	95.4Lm/W
色温度	5,000K +300K -700K
演色性	75

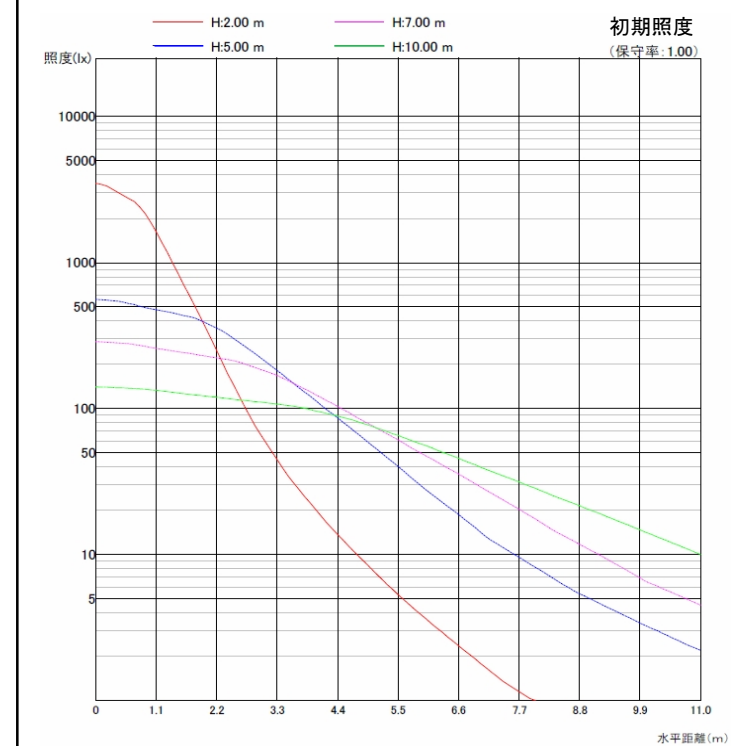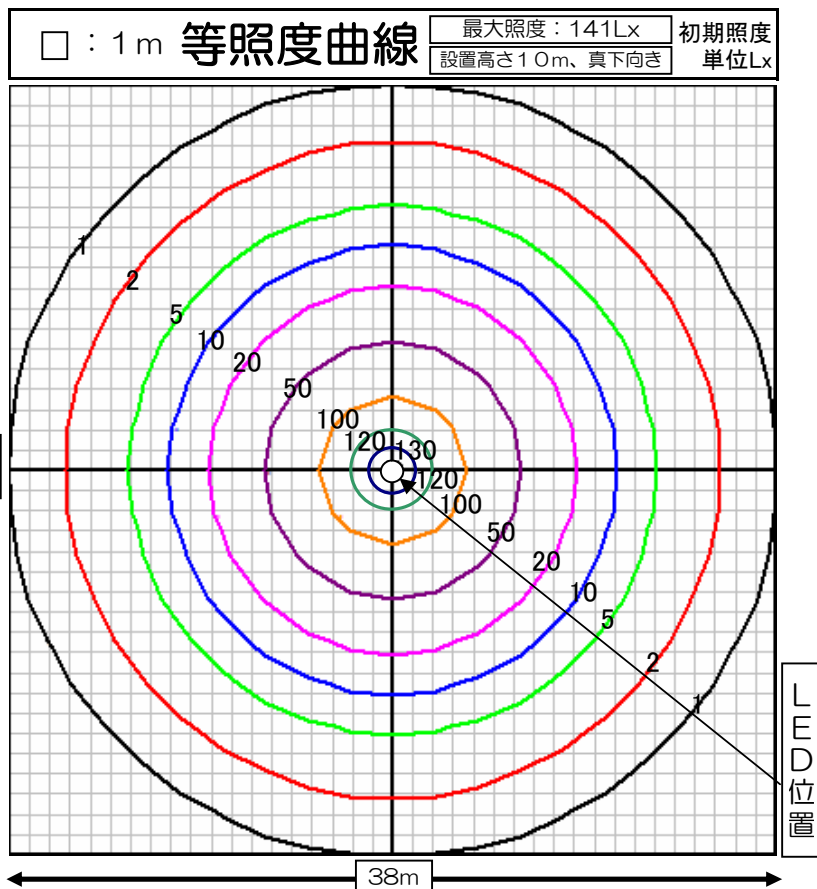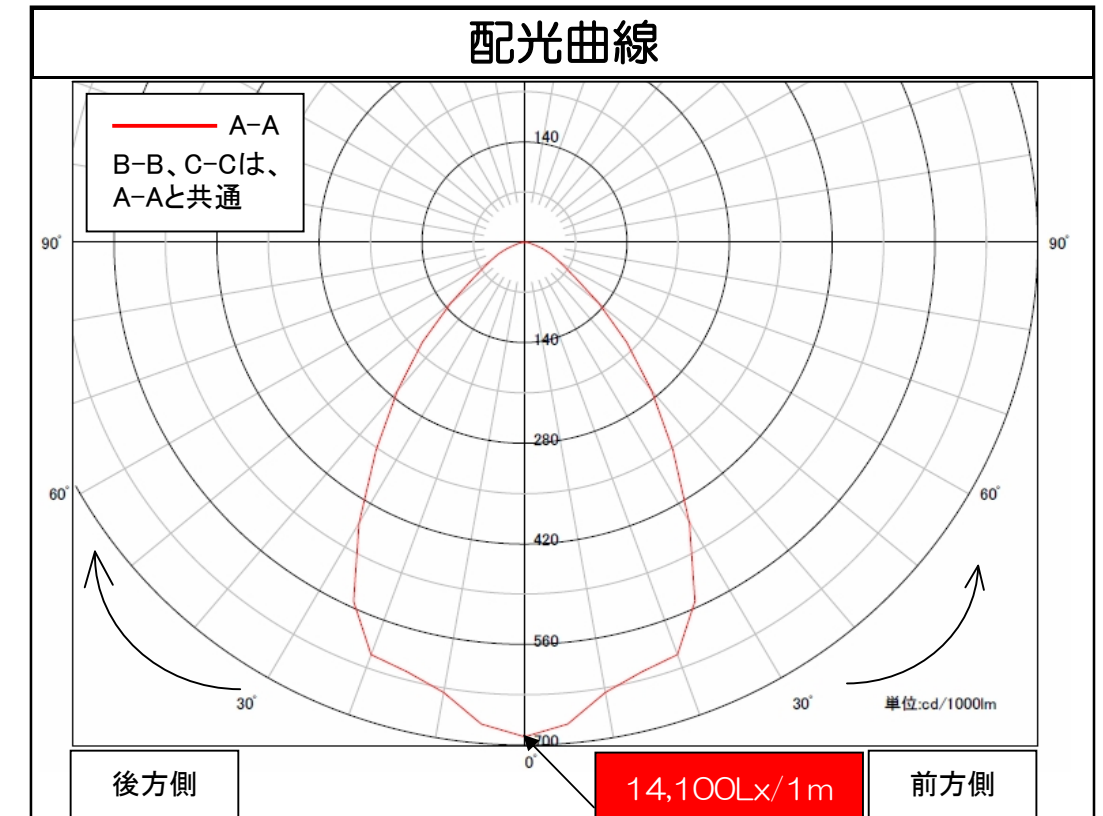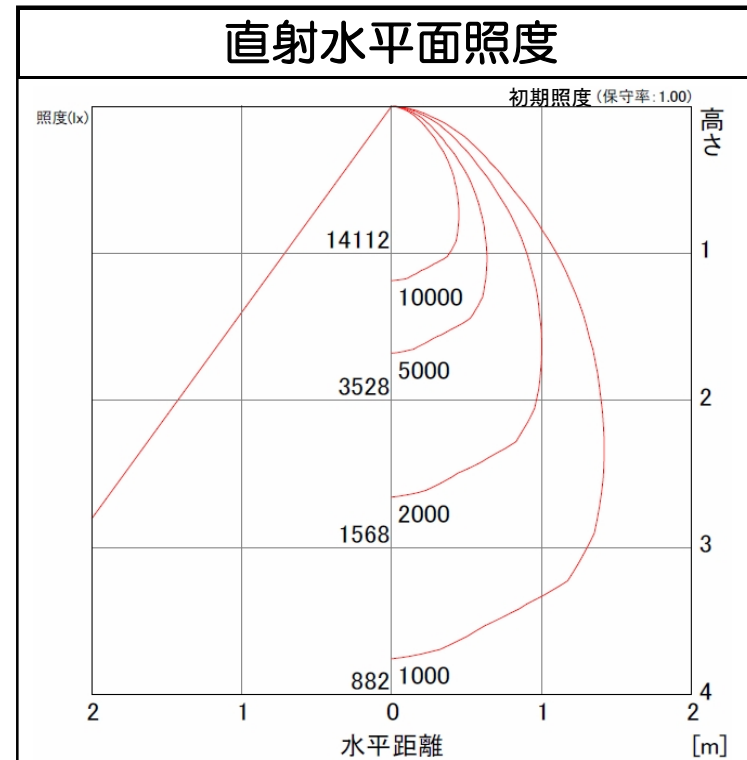

照明率表

作業面照明率(×0.01)

天井	壁	床	室指数												
			0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	57	77	86	94	102	105	111	115	118	121	123	126	127
		10	53	71	78	84	90	93	97	100	101	103	104	106	107
	50	30	45	66	74	82	91	95	103	108	111	116	119	122	125
		10	43	62	69	77	84	87	92	96	98	100	102	104	106
70	30	30	38	59	66	75	84	88	96	102	106	111	115	120	123
		10	37	57	63	71	79	82	88	92	95	98	100	103	105
	10	10	34	53	59	67	75	78	84	89	92	96	98	101	104
		70	30	56	76	84	91	99	102	108	112	114	117	119	121
50	10	10	52	70	77	83	89	91	95	98	100	102	103	104	105
		50	30	44	65	73	81	90	94	100	106	108	113	115	118
	10	10	43	62	69	76	83	86	91	95	97	99	101	103	104
		30	38	58	65	74	83	87	94	100	104	109	112	116	119
30	10	10	37	57	63	71	79	81	87	92	94	97	99	102	104
		70	30	56	76	84	91	99	102	108	112	114	117	119	121
	10	10	42	61	67	75	82	84	89	93	95	97	99	101	102
		30	38	57	64	73	81	84	91	96	99	103	106	109	112
0	10	10	34	53	59	66	74	77	83	88	90	94	96	99	101
		30	37	57	63	71	79	82	88	93	95	99	101	104	106
	10	10	37	56	62	69	77	80	85	89	91	94	96	98	100
		30	37	56	62	69	77	80	85	89	91	94	96	98	100
0	0	0	32	51	57	64	72	75	80	85	87	90	92	95	96
		0	32	51	57	64	72	75	80	85	87	90	92	95	96

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります