

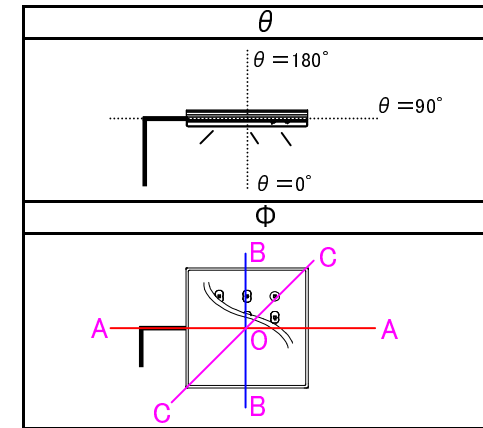
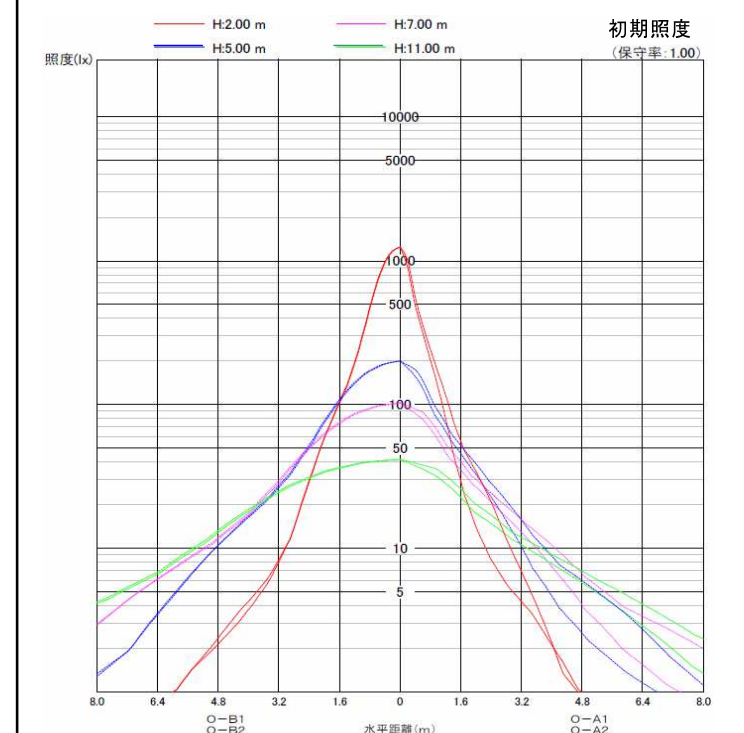
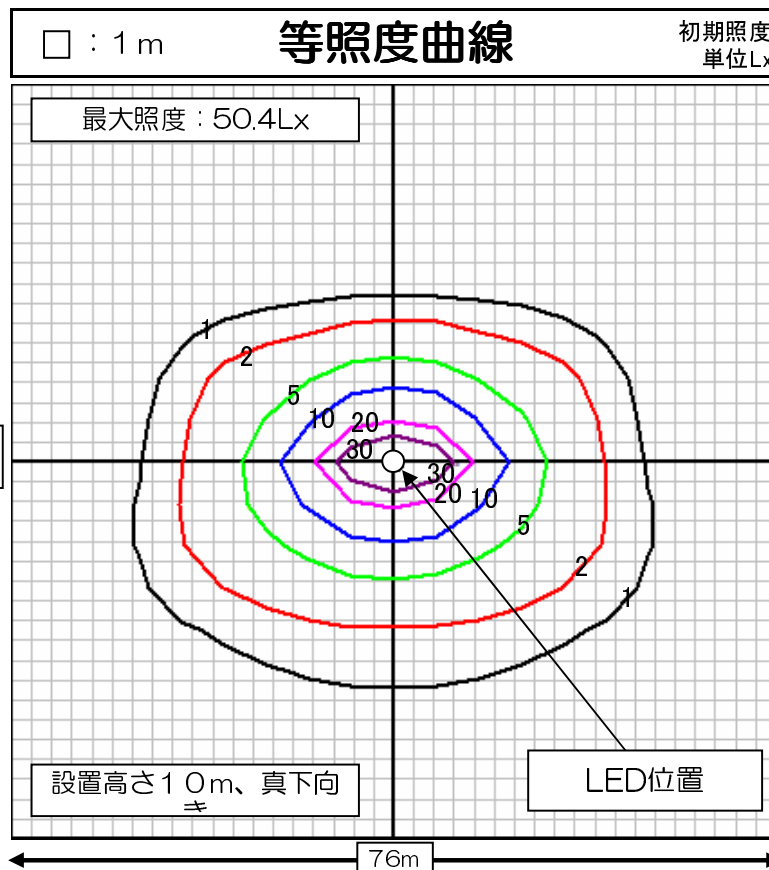


	品名	LEDワイドスクエアライト
	型番	LED-12-LA
	光源	高輝度白色LED12球
	配光の種類	非対称配光

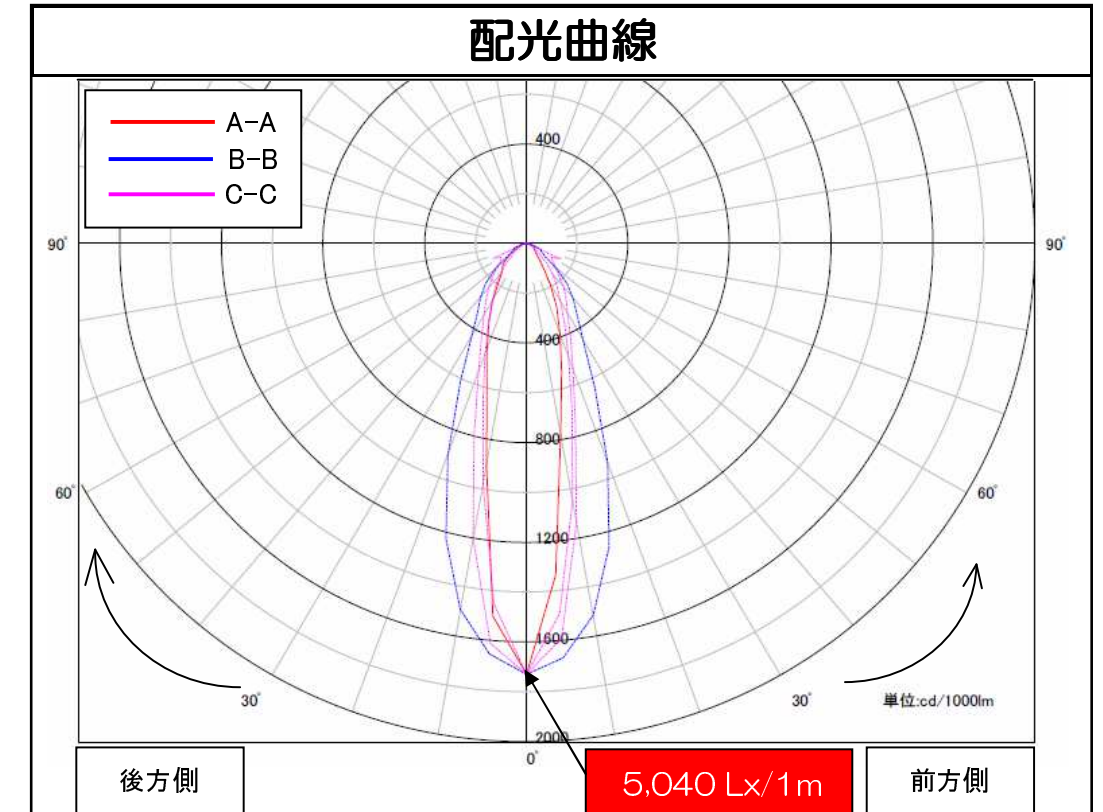

組合せ電源装置		
品番 : HLG-60H-20A		
配光角	1/2ビーム角	水平40度、垂直20度
	1/10ビーム角	水平100度、垂直65度
一次側消費電力について		
電源装置AC100V入力時	電源装置AC200V入力時	
29.3W/29.7VA	29.3W/30.7VA	

照明器具製品仕様	
電源電圧	DC12.18V
電流	2.1A
消費電力	25.6W
照度	(中心) 5,040Lx/1m
器具光束	2,919Lm
光源光束	3,451Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力) (AC200V時)	99.6Lm/W
色温度	5,000K +200K -500K
演色性	70~73

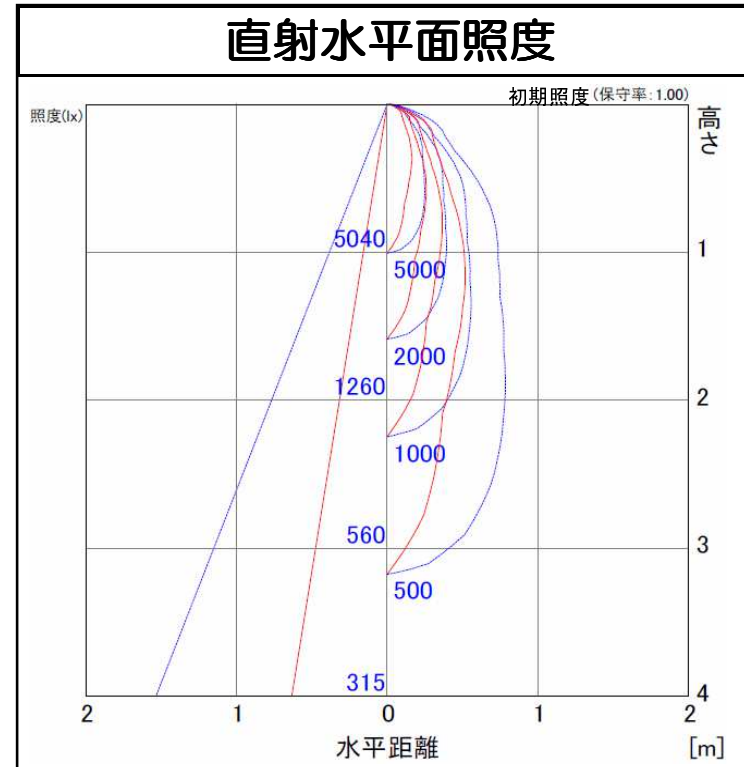

照明率表

作業面照明率(×0.01)

天井	反射率(%)	室指数																
		壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0		
80	70	30	55	73	84	92	99	104	110	114	117	120	123	125	127			
		10	52	68	77	83	88	91	96	98	100	102	104	105	107			
	50	30	43	61	72	80	88	93	101	106	110	115	118	122	125			
		10	42	58	68	74	81	85	90	94	96	100	101	104	105			
	30	30	37	53	64	72	80	86	94	100	104	110	114	119	123			
		10	36	52	61	68	75	80	86	90	93	97	99	102	104			
70	70	30	32	47	57	64	71	76	82	87	90	94	97	101	103			
		10	32	47	57	64	71	76	82	87	90	94	97	101	103			
	50	30	30	43	60	71	79	86	91	99	104	107	112	114	118	121		
		10	30	42	57	67	74	80	84	89	93	95	98	100	103	104		
	30	30	36	53	64	71	79	85	92	98	102	107	111	115	119			
		10	36	51	61	68	75	79	85	89	92	96	98	101	103			
50	70	30	32	47	57	64	71	75	82	86	90	94	97	100	102			
		10	32	47	57	64	71	75	82	86	90	94	97	100	102			
	50	30	30	42	59	69	76	83	88	94	99	101	105	108	111	113		
		10	30	42	56	66	72	78	82	88	91	93	96	98	101	102		
	30	30	36	52	62	70	77	82	89	94	97	102	105	109	112			
		10	36	51	61	67	74	78	84	88	91	94	97	99	101			
30	70	30	36	51	61	68	75	80	86	90	93	97	100	103	105			
		10	35	50	60	67	73	77	83	87	89	93	95	98	99			
	50	30	32	47	56	63	70	74	80	84	87	91	94	97	99			
		10	32	47	56	63	70	74	80	84	87	91	94	97	99			
	30	30	36	51	61	68	75	80	86	90	93	97	100	103	105			
		10	35	50	60	67	73	77	83	87	89	93	95	98	99			
0	0	0	31	45	55	61	68	72	78	82	85	89	91	94	96			

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります