
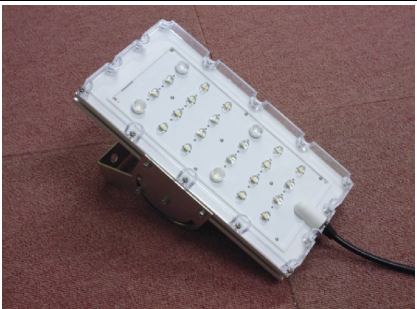






LEDワイドレクタングルライト	品名	LEDワイドレクタングルライト
	型番	LED-W-24-WBA
	光源	高輝度白色LED24球
	配光の種類	非対称配光

アクリルカバー（製品形状は代表的な写真です）

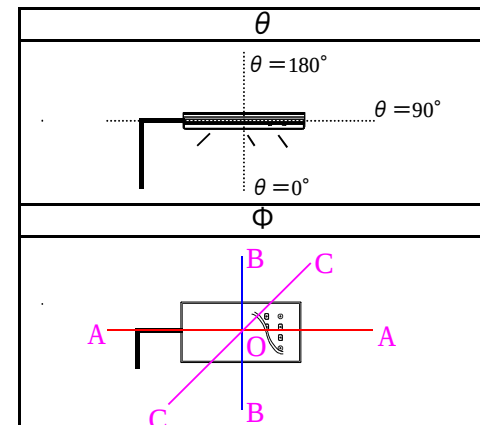

組合せ電源装置	
品番：HLG-100H-20A	
配光角	水平140度、垂直85度
一次側消費電力について	
電源装置AC100V入力時	電源装置AC200V入力時
57.9W/58.6VA	57.5W/60.7VA

照明器具製品仕様	
電源電圧	DC12.18V
電流	4.2A
消費電力	51.2W
照度	(中心) 1,656Lx/1m (130度) 3,787Lx/1m
器具光束	5,699Lm
光源光束	6,903Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力) (AC200V時)	99.1Lm/W
色温度	5,000K $\pm 200K$ $-500K$
演色性	70~73

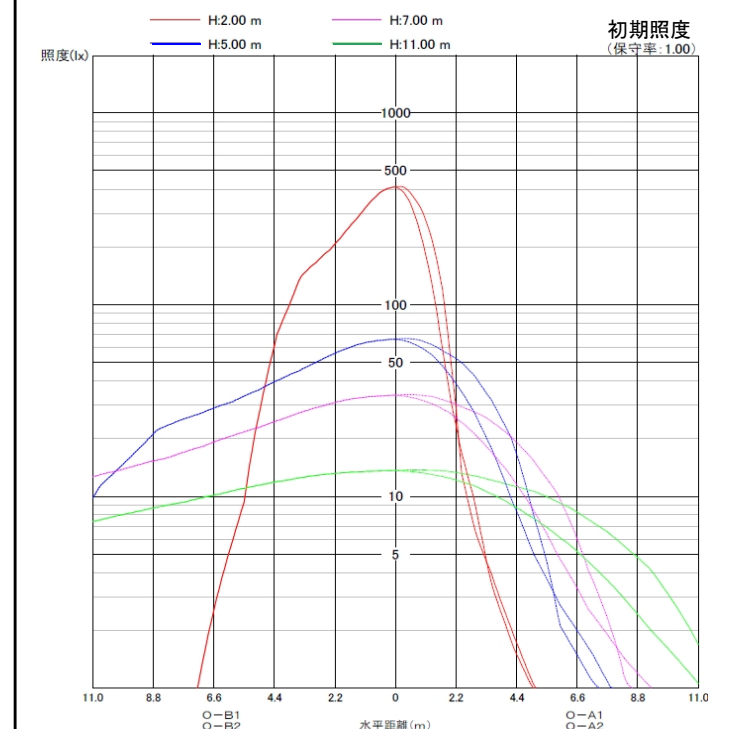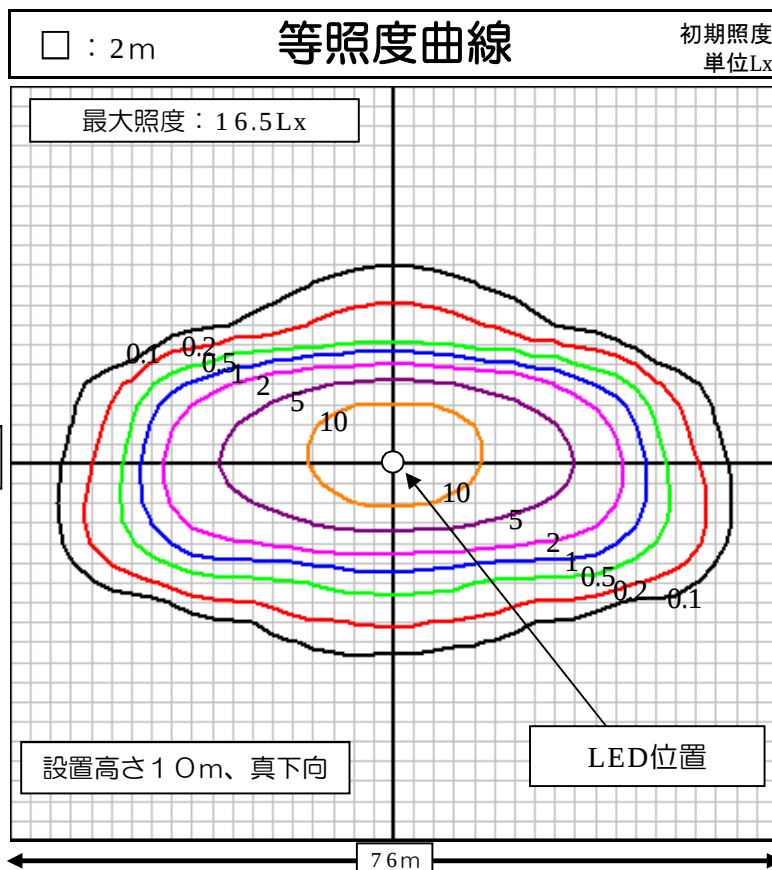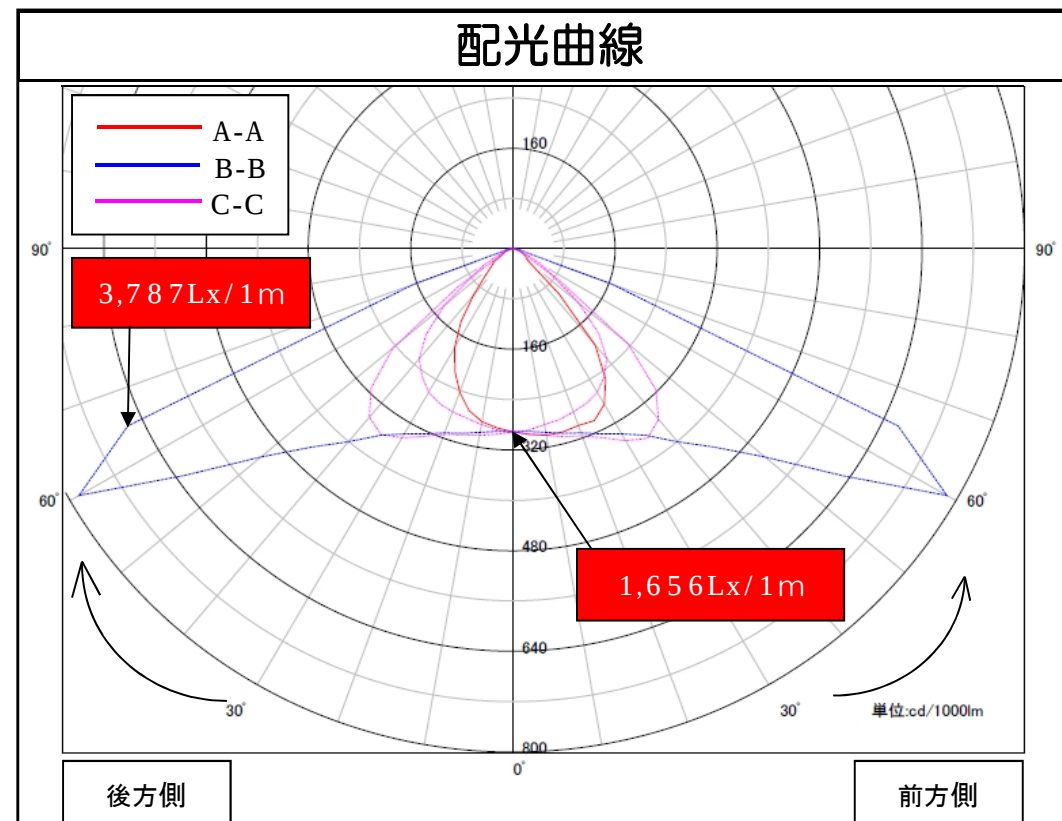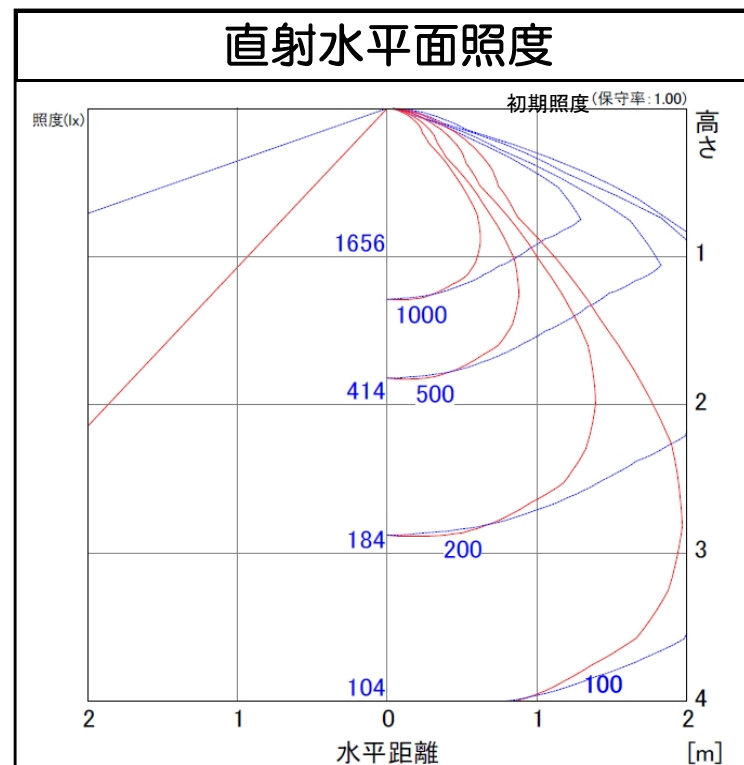

照明率表

		作業面照明率(×0.01)															
		反射率(%)		室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0		
80	70	30	44	61	73	82	91	96	105	110	113	118	121	124	126		
		10	41	56	66	74	81	85	91	95	97	100	102	104	106		
	50	30	30	46	58	68	77	84	94	101	105	111	115	120	123		
		10	29	44	54	63	71	76	84	89	92	96	99	102	104		
70	30	30	22	37	48	58	68	75	85	93	98	106	110	116	121		
		10	22	36	46	55	64	69	78	84	88	93	96	100	103		
	10	10	17	31	40	49	58	64	73	80	84	90	93	98	101		
		30	43	59	70	79	88	93	101	106	109	114	116	119	122		
50	10	40	55	64	72	79	83	89	93	96	99	101	103	104			
		50	30	46	57	66	76	82	91	98	102	108	112	116	119		
	10	29	44	53	62	70	75	83	88	91	95	98	101	103			
		30	22	37	47	57	67	73	84	91	96	103	107	113	117		
30	10	22	36	46	54	63	69	77	83	87	92	95	99	101			
		10	17	31	40	49	58	64	73	79	83	89	93	97	100		
	50	30	29	44	54	63	73	78	87	93	97	102	105	109	111		
		10	28	42	52	60	68	73	81	86	89	93	96	99	101		
0	30	30	22	36	46	55	65	71	81	87	92	98	102	106	110		
		10	22	36	45	54	62	68	76	82	85	90	93	97	99		
	10	10	17	31	40	48	57	63	72	78	82	88	91	95	98		
		30	22	36	45	54	63	69	78	84	88	93	96	100	103		
0	0	0	16	29	37	46	55	60	69	75	79	84	87	91	94		

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります