




LEDワイドジャンボスクエアライト	品名	LEDワイドジャンボスクエアライト
	型番	LED-W-48-WBP
	光源	高輝度白色LED48球
	配光の種類	非対称配光

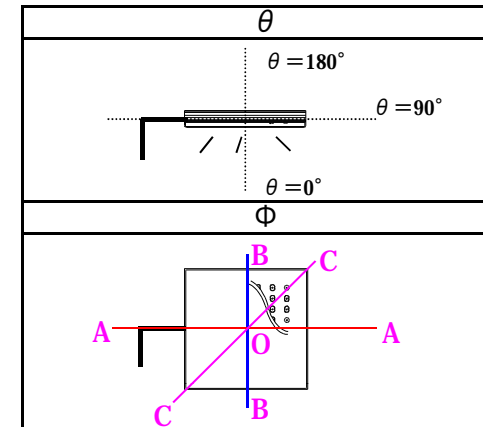



組合せ電源装置	
品番：HPS-170W17V10A	
配光角	水平140度、垂直85度

一次側消費電力について	
電源装置AC100V入力時	電源装置AC200V入力時
110.7W/111.9VA	110.5W/116.8VA

照明器具製品仕様	
電源電圧	DC12.18V
電流	8.4A
消費電力	102.3W
照度	(中心) 3,182Lx/1m (130度) 7,748Lx/1m
器具光束	11,454Lm
光源光束	13,607Lm
固有エネルギー消費効率 (器具光束÷一次側入力電力)(AC200V時)	103.7Lm/W
色温度	5,000K +200K -500K
演色性	70~73

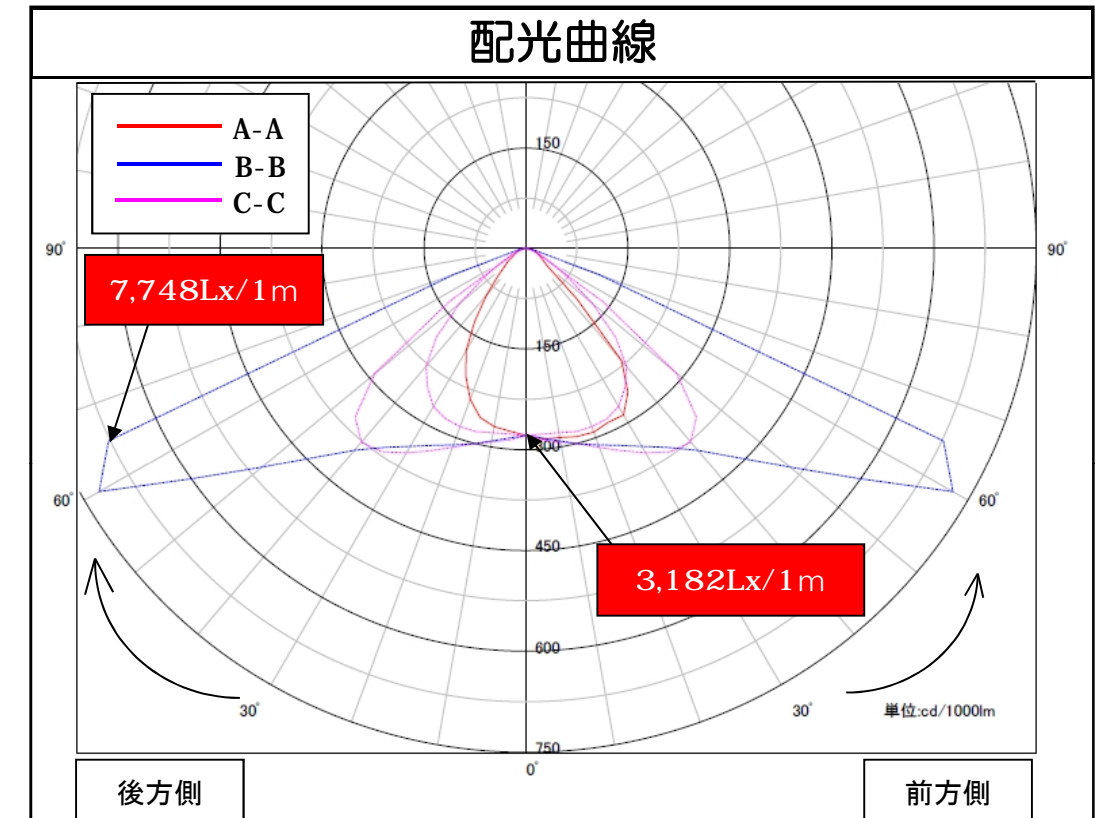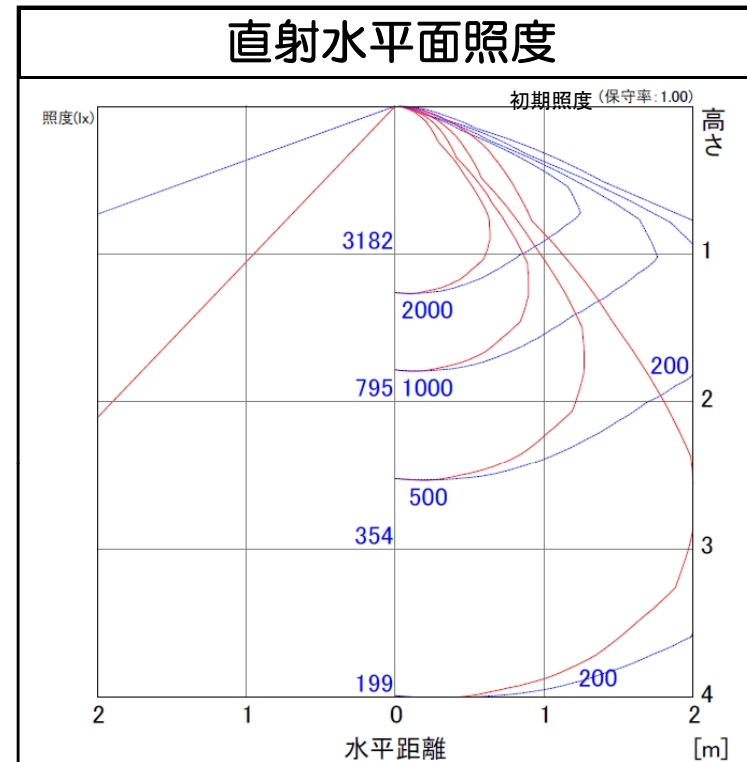

□ : 2m 等照度曲線 初期照度

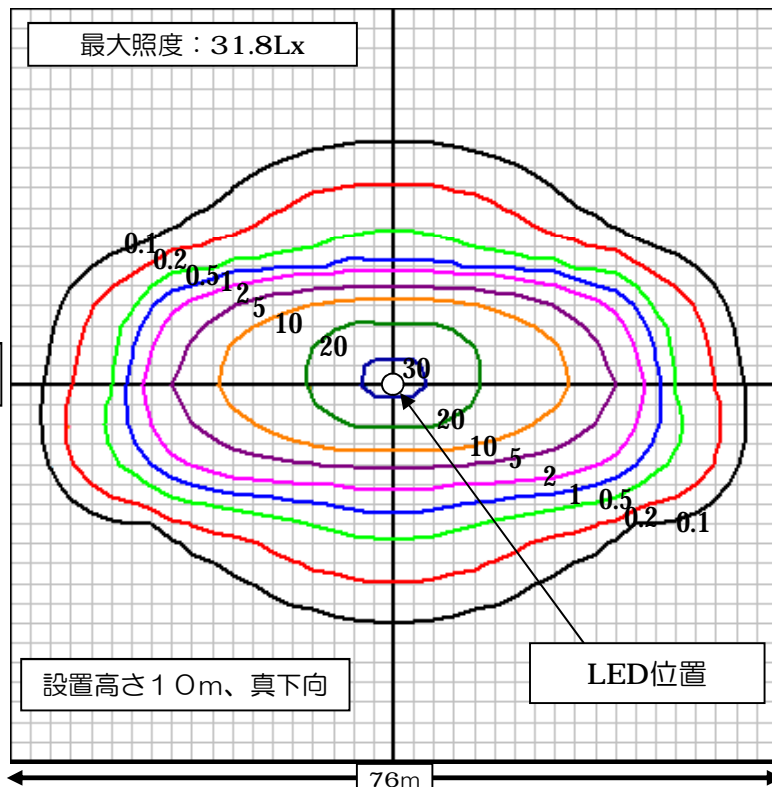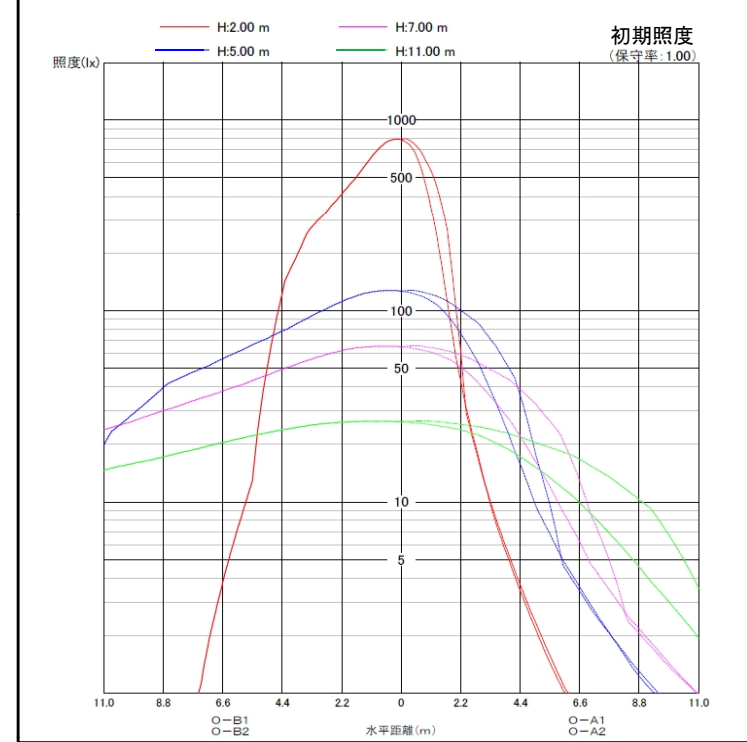

### 照明率表

		作業面照度率 (×0.01)													
		反射率(%)		室指数											
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	61	73	82	91	97	105	110	114	118	121	124	126
	50	30	41	56	66	74	81	85	91	95	97	100	102	104	106
	10	29	44	54	63	71	77	84	89	92	97	99	102	104	
70	30	30	22	37	48	58	68	75	86	94	99	106	110	116	120
	50	30	22	36	46	55	64	70	78	84	88	93	96	100	102
	10	10	17	31	40	49	59	64	73	80	84	90	93	98	101
50	70	30	43	59	71	80	88	93	101	106	110	114	116	119	122
	50	30	29	46	57	66	76	82	92	98	102	108	112	116	119
	10	29	44	54	62	70	76	83	88	91	95	98	101	103	
30	30	30	22	37	48	57	67	74	84	91	96	103	107	112	117
	50	30	22	36	46	55	64	69	78	84	87	92	95	99	101
	10	10	17	31	40	49	58	64	73	80	84	89	93	97	100
0	70	30	29	44	55	64	73	79	87	93	97	102	105	109	111
	50	30	22	36	47	56	65	71	81	88	92	98	102	106	109
	10	10	21	35	45	54	63	68	76	82	86	90	93	97	99
0	30	30	21	36	45	54	64	69	78	84	88	93	96	100	103
	50	30	21	35	44	53	62	67	75	81	84	89	92	95	97
	10	10	17	30	40	48	57	63	72	78	81	87	90	94	96
0	0	0	15	28	38	46	55	61	69	75	79	84	87	91	94

数値は、代表的な仕様であり、LEDの特性上異なる場合もあります